




CR(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 360°
 Material: Silicon
 Installation: Suspended Surface mounted
 Body color: Milk White



Model	Power	Input voltage(V)	Size(mm) D*L	Size(Inch) D*L
LL0176S	20W/m	AC220-240V or AC120-277V 50/60Hz	D50*L1000	D2.0*L39.4
LL0176M	20W/m		D50*L1000	D2.0*L39.4

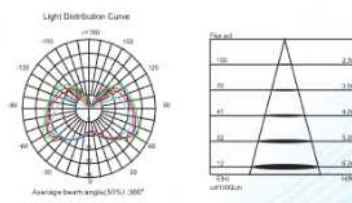