




Cloud series with a unique shape and proportions, widely use for general lighting applications. Available in multiple diameter sizes from 11.8" up to 47.2", mounted and suspended, for optional light distributions to fit the scale, with acoustic version for optional.



Model	Input Voltage(V)	Power	CRJ	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch)W*H*L
LL0213BS/BM-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	300	BS: suspended with 1.5m power cable and safety cable BM: surface mounted	Silicon+Alu	D300*18/*45	D11.8*0.71*1.78
LL0213BS/BM-60W		60W									D400*18/*45	D15.7*0.71*1.78
LL0213BS/BM-80W		80W									D600*18/*45	D23.6*0.71*1.78
LL0213BS/BM-125W		125W									D900*18/*45	D35.4*0.71*1.78
LL0213BS/BM-150W		150W									D1200*18/*45	D47.2*0.71*1.78

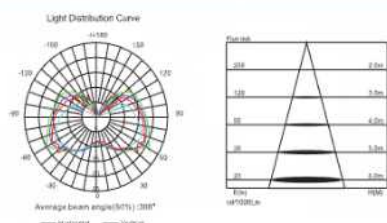