






CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/3500/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 60°
 Installation: Suspended
 Material: Alu+PMMA

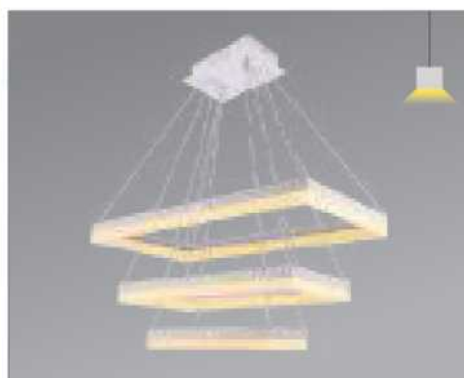

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL02095-25W	25W	AC220-240V OR AC120-277V 50/60Hz	200*400*70	7.9*15.7*2.8
LL02095-40W	40W		300*600*70	11.8*23.6*2.8
LL02095-50W	50W		400*800*70	15.7*31.5*2.8
LL02095-80W	80W		600*1000*70	23.6*39.4*2.8

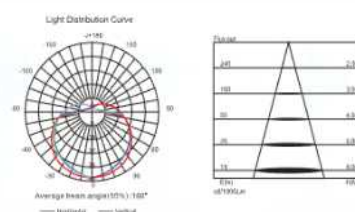

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/3500/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 280°
 Installation: Suspended
 Material: Alu+PMMA

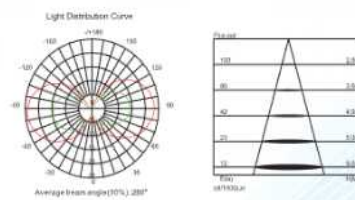

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0210UDS-50W	50W	AC220-240V OR AC120-277V 50/60Hz	200*400*72	7.9*15.7*2.8
LL0210UDS-80W	80W		300*600*72	11.8*23.6*2.8
LL0210UDS-100W	100W		400*800*72	15.7*31.5*2.8
LL0210UDS-160W	160W		600*1000*72	23.6*39.4*2.8