





CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 105
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01955-40W-U	40W	AC220-240V or AC120-277V 50/60Hz	600*600*25	23.6*23.6*0.98
LL01955-60W-U	60W		900*900*25	35.4*35.4*0.98
LL01955-80W-U	80W		1200*1200*25	47.2*47.2*0.98

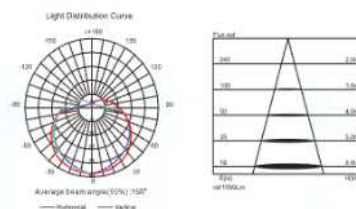

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 105
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PC

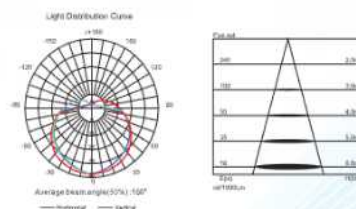

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01955-40W-D	40W	AC220-240V or AC120-277V 50/60Hz	600*600*25	23.6*23.6*0.98
LL01955-60W-D	60W		900*900*25	35.4*35.4*0.98
LL01955-80W-D	80W		1200*1200*25	47.2*47.2*0.98