





CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 105
LED type: Samsung
Beam angle: 160°
Installation: Suspended
Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01955-40W-H	40W	AC220-240V or AC120-277V 50/60Hz	600*600*25	23.6*23.6*0.98
LL01955-60W-H	60W		900*900*25	35.4*35.4*0.98
LL01955-80W-H	80W		1200*1200*25	47.2*47.2*0.98

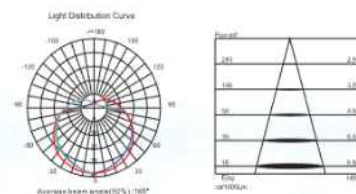

CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 105
LED type: Samsung
Beam angle: 160°
Installation: Suspended
Material: Alu+PC

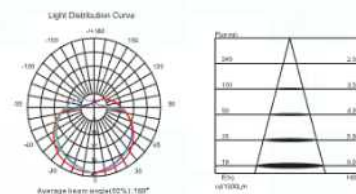

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01955-40W-O	40W	AC220-240V or AC120-277V 50/60Hz	600*600*25	23.6*23.6*0.98
LL01955-60W-O	60W		900*900*25	35.4*35.4*0.98
LL01955-80W-O	80W		1200*1200*25	47.2*47.2*0.98

