





CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 105
 LED type: Samsung
 Beam angle: 120°
 Installation: Surface Mounted
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0187M-25W	25W	AC220-240V or AC120-277V 50/60Hz	480*416*85(ID480)	18.9*16.4*3.4
LL0187M-40W	40W		600*520*85(ID600)	23.6*20.5*3.4
LL0187M-90W	90W	AC120-277V 50/60Hz	900*780*85(ID900)	35.4*30.7*3.4
LL0187M-180W	180W		1200*1040*85(ID1200)	47.2*40.9*3.4

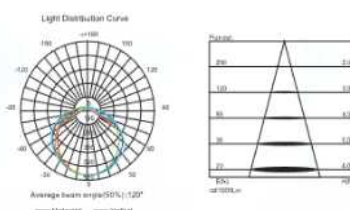

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 105
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended
 Material: Alu+PC

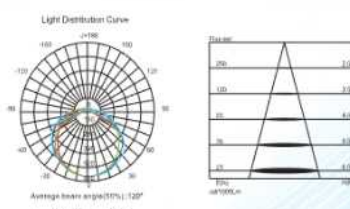

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0187S-25W	25W	AC220-240V or AC120-277V 50/60Hz	480*416*75(ID480)	18.9*16.4*3.0
LL0187S-40W	40W		600*520*75(ID600)	23.6*20.5*3.0
LL0187S-90W	90W	AC120-277V 50/60Hz	900*780*75(ID900)	35.4*30.7*3.0
LL0187S-180W	180W		1200*1040*75(ID1200)	47.2*40.9*3.0