




Features:


- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Can be grouped to different patterns to match the architecture style;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Supermarket, hotel, home, office, restaurant, public building, etc.

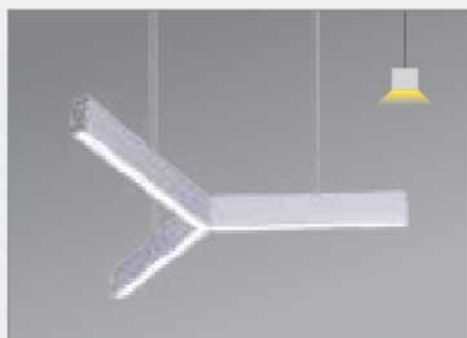

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 105
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0190S/M-40W	40W	AC220-240V or AC120-277V 50/60Hz	563*501*75(L300)	22.2*19.7*3.0/3.4
LL0190S/M-80W	80W		1081*963*75(L600)	42.6*37.9*3.0/3.4
LL0190S/M-120W	120W		1600*1426*75(L900)	63.0*56.1*3.0/3.4