





CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended with 1.5m power cable and safety cable
 Material: Alu+PC
 Body color: White/Black



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0112S-15W-PRO	15W	AC220-240V or AC120-277V 50/60Hz	D300*100	D11.8*4.0
LL0112S-20W-PRO	20W		D400*100	D15.7*4.0
LL0112S-25W-PRO	25W		D480*100	D18.9*4.0
LL0112S-40W-PRO	40W		D600*100	D23.6*4.0
LL0112S-90W-PRO	90W		D900*100	D35.4*4.0
LL0112S-180W-PRO	180W		D1200*100	D47.2*4.0

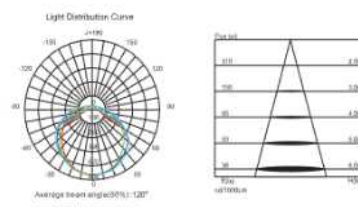


CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: 120°
 Installation: 1.2m stem mounted
 Material: Alu+PC
 Body color: White/Black

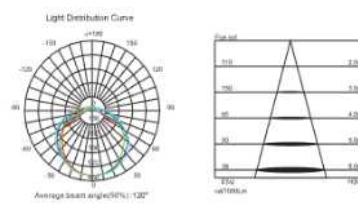

Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0112ST-15W-PRO	15W	AC220-240V or AC120-277V 50/60Hz	D300*100	D11.8*4.0
LL0112ST-20W-PRO	20W		D400*100	D15.7*4.0
LL0112ST-25W-PRO	25W		D480*100	D18.9*4.0
LL0112ST-40W-PRO	40W		D600*100	D23.6*4.0
LL0112ST-90W-PRO	90W		D900*100	D35.4*4.0
LL0112ST-180W-PRO	180W		D1200*100	D47.2*4.0



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: 120°
 Installation: Surface mounted
 Material: Alu+PC
 Body color: White/Black

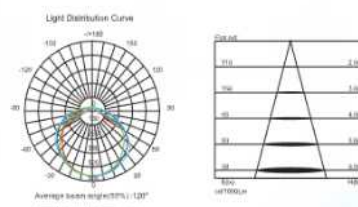

Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0112M-15W-PRO	15W	AC220-240V or AC120-277V 50/60Hz	D300*85	D11.8*5.3
LL0112M-20W-PRO	20W		D400*85	D15.7*5.3
LL0112M-25W-PRO	25W		D480*85	D18.9*5.3
LL0112M-40W-PRO	40W		D600*85	D23.6*5.3
LL0112M-90W-PRO	90W		D900*85	D35.4*5.3
LL0112M-150W-PRO	150W		D1200*85	D47.2*5.3