




Jade Series




CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 80
LED type: Samsung
Beam angle: 120°
Installation: Suspended
Material: Alu+PMMA

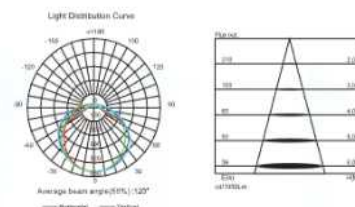

Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0114S-15W	15W	AC220-240V or AC120-277V 50/60Hz	D300*24	D11.8*0.9
LL0114S-20W	20W		D400*24	D15.7*0.9
LL0114S-30W	30W		D500*24	D19.7*0.9
LL0114S-40W	40W		D600*24	D23.6*0.9
LL0114S-90W	90W		D900*24	D35.4*0.9



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 80
LED type: Samsung
Beam angle: 120°
Installation: Surface Mounted
Material: Alu+PMMA

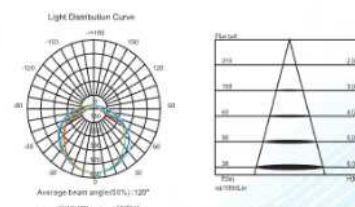

Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0114M-15W	15W	AC220-240V or AC120-277V 50/60Hz	D300*55	D11.8*2.2
LL0114M-20W	20W		D400*55	D15.7*2.2
LL0114M-30W	30W		D500*55	D19.7*2.2
LL0114M-40W	40W		D600*55	D23.6*2.2
LL0114M-90W	90W		D900*55	D35.4*2.2