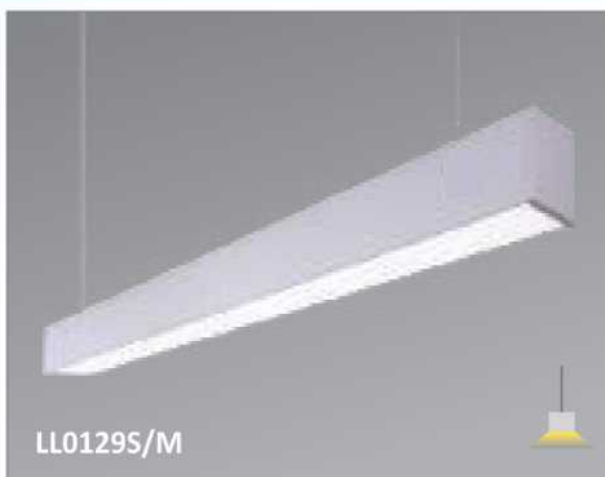








LL0101S/M LL0155S/M

LL0129S/M
Features:

- Streamline design style, can be seamless connection with any dimension, with an elegant presentation;
- Can be grouped to different patterns to match the architecture style;
- High efficiency and energy saving;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Different profile sizes are available to well light up the space!

Application:

Hotel, hospital, shopping mall, showroom, supermarket, office, KTV, museum, cinema, public buildings, etc.



Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0101S LL0101M	LL0101S-1200	AC220-240V or AC120-277V 50/60Hz	36W	≥80	3000K/	≥0.9	105	Osram	120	Suspended / Mounted	Alu+PC	35*75*1200	1.4*3.0*47.2
	LL0101S-1500		50W	or	4000K/							35*75*1500	1.4*3.0*59.1
	LL0101S-2400		70W	≥90	5000K							35*75*2400	1.4*3.0*94.5
LL0155S LL0155M	LL0155S-1200	AC220-240V or AC120-277V 50/60Hz	40W	≥80	3000K/	≥0.9	105	Osram	120	Suspended / Mounted	Alu+PC	50*75*1200	2.0*3.0*47.2
	LL0155S-1500		50W	or	4000K/							50*75*1500	2.0*3.0*59.1
	LL0155S-2400		80W	≥90	5000K							50*75*2400	2.0*3.0*94.5
LL0129S LL0129M	LL0129S-1200	AC220-240V or AC120-277V 50/60Hz	50W	≥80	3000K/	≥0.9	105	Osram	120	Suspended / Mounted	Alu+PC	75*75*1200	3.0*3.0*47.2
	LL0129S-1500		70W	or	4000K/							75*75*1500	3.0*3.0*59.1
	LL0129S-2400		100W	≥90	5000K							75*75*2400	3.0*3.0*94.5

