

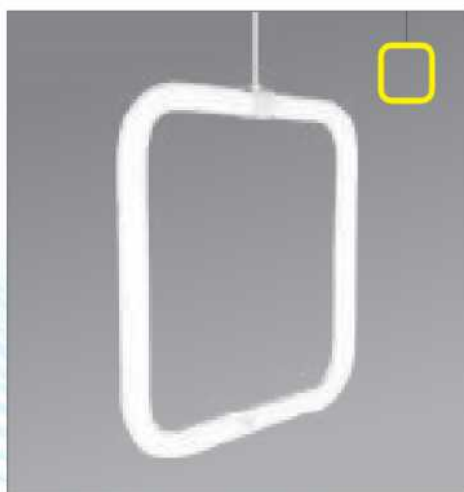




CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 360°
 Installation: Direct suspended with 1.5m power cable and safety cable
 Material: PMMA
 Body color: Milk White



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01795-25W	25W	AC220-240V or AC120-277V 50/60Hz	400*400*30	15.7*15.7*1.2
LL01795-40W	40W		600*600*30	23.6*23.6*1.2
LL01795-50W	50W		800*800*30	31.5*31.5*1.2
LL01795-60W	60W		1000*1000*30	39.4*39.4*1.2
LL01795-80W	80W		1200*1200*30	47.2*47.2*1.2