




Up and Down



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: $120^\circ \times 2$
Installation: Suspended
Material: Alu+PC

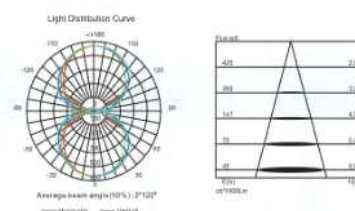


Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118UDS-60W	60W	AC220-240V or AC120-277V 50/60Hz	D600*H40	D23.6*5.5
LL0118UDS-120W	120W		D900*H40	D35.4*5.5
LL0118UDS-220W	220W		D1200*H40	D47.2*5.5

Up and Down



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: $120^\circ \times 2$
Installation: Surface Mounted
Material: Alu+PC

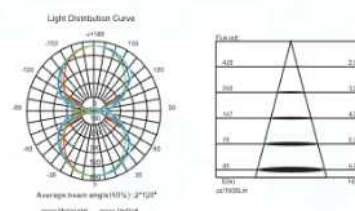

Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118UDM-60W	60W	AC220-240V or AC120-277V 50/60Hz	D600*H75	D23.6*6.9
LL0118UDM-120W	120W		D900*H75	D35.4*6.9
LL0118UDM-220W	220W		D1200*H75	D47.2*6.9

