




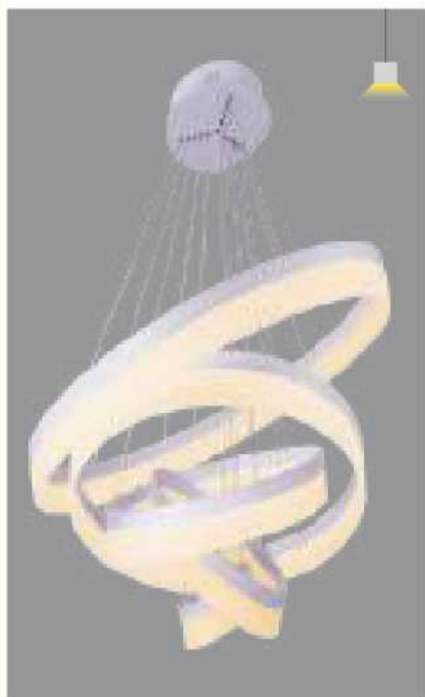

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PMMA





Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL0203S-15W	15W	AC220-240V or AC120-277V 50/60Hz	D400* Φ 3*70	D15.7*0.5*2.8
LL0203S-25W	25W		D600* Φ 3*70	D23.6*0.5*2.8
LL0203S-35W	35W		D800* Φ 3*70	D31.5*0.5*2.8
LL0203S-45W	45W		D1000* Φ 3*70	D39.4*0.5*2.8
LL0203S-50W	50W		D1200* Φ 3*70	D47.2*0.5*2.8
LL0203S-60W	60W		D1500* Φ 3*70	D59.1*0.5*2.8



Up and Down



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 280°
 Installation: Suspended
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL0204UDS-30W	30W	AC220-240V or AC120-277V 50/60Hz	D400* Φ 3*72	D15.7*0.5*2.8
LL0204UDS-50W	50W		D600* Φ 3*72	D23.6*0.5*2.8
LL0204UDS-60W	60W		D800* Φ 3*72	D31.5*0.5*2.8
LL0204UDS-80W	80W		D1000* Φ 3*72	D39.4*0.5*2.8
LL0204UDS-90W	90W		D1200* Φ 3*72	D47.2*0.5*2.8
LL0204UDS-100W	100W		D1500* Φ 3*72	D59.1*0.5*2.8

