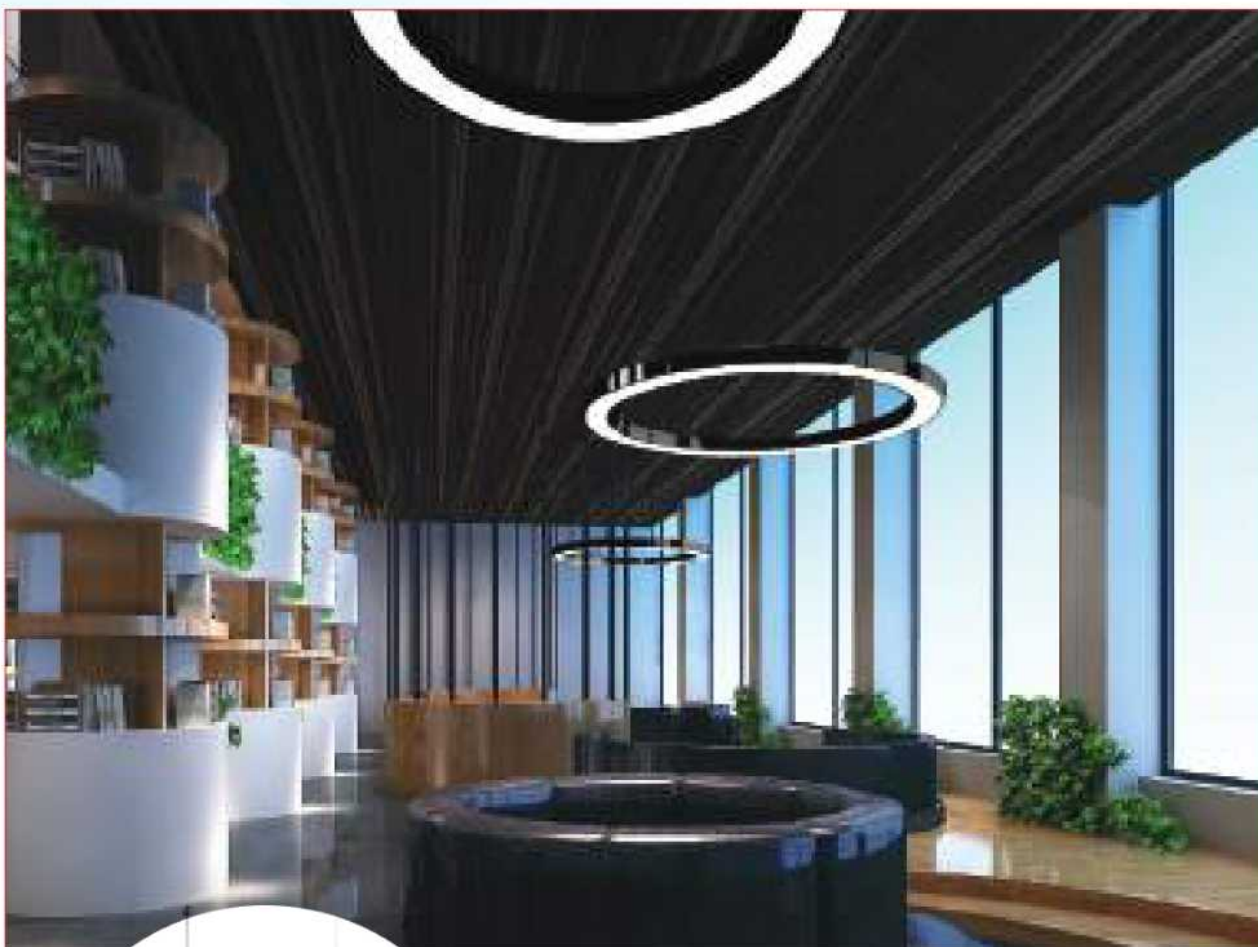


Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) D*W*H	Size(Inch) D*W*H
LL0113S/M-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	85	Samsung	120	Suspended / Mounted	Alu+PC	D600*32*38	D23.6*1.3*1.5
LL0113S/M-50W		50W									D900*32*38	D35.4*1.3*1.5
LL0113S/M-80W		80W									D1200*32*38	D47.2*1.3*1.5
LL0113S/M-100W		100W									D1500*32*38	D59.1*1.3*1.5
LL0113S/M-120W		120W									D2000*32*38	D78.8*1.3*1.5
LL0113S/M-200W		200W									D3000*32*38	D118.1*1.3*1.5
LL0113S/M-400W		400W									D5000*32*38	D196.9*1.3*1.5