


Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) D*W*H	Size(Inch) D*W*H
LL0115UDS-80W	AC220-240V or AC220-277V 50/60Hz	80W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	85	Samsung	120*2	Suspended	Alu+PC	D900*42*68	D35.4*1.7*2.7
LL0115UDS-120W		120W									D1200*42*68	D47.2*1.7*2.7
LL0115UDS-135W		135W									D1500*42*68	D59.1*1.7*2.7
LL0115UDS-150W		150W									D2000*42*68	D78.7*1.7*2.7
LL0115UDS-300W		300W									D3000*42*68	D118.1*1.7*2.7
LL0115UDS-480W		480W									D5000*42*68	D196.9*1.7*2.7

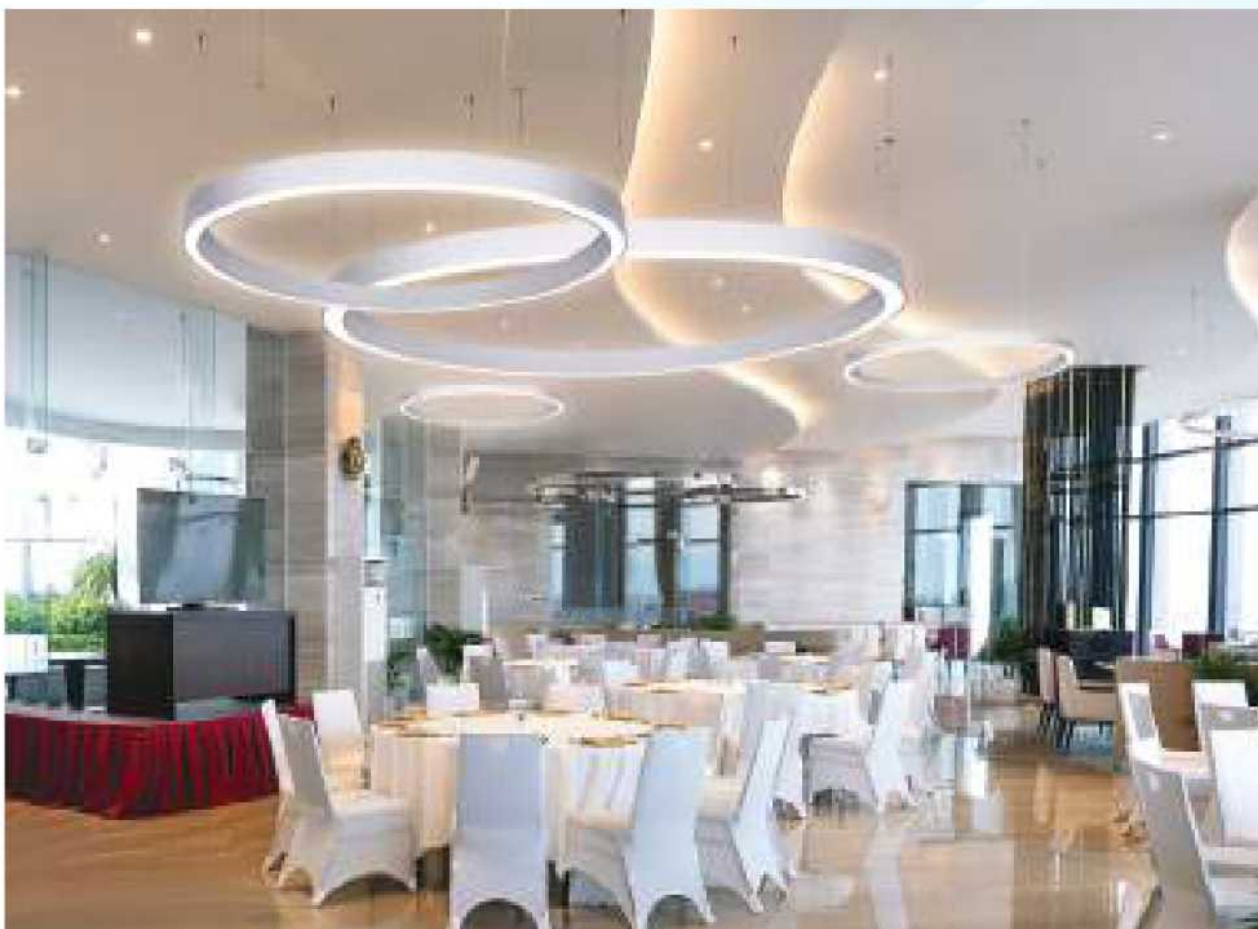