





CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 300°
 Installation: Suspended
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL02075-20W	20W	AC220-240V or AC120-277V 50/60Hz	D400*10*20	D15.7*0.4*0.8
LL02075-30W	30W		D600*10*20	D23.6*0.4*0.8
LL02075-40W	40W		D800*10*20	D31.5*0.4*0.8
LL02075-50W	50W		D1000*10*20	D39.4*0.4*0.8
LL02075-60W	60W		D1200*10*20	D47.2*0.4*0.8
LL02075-80W	80W		D1500*10*20	D59.1*0.4*0.8

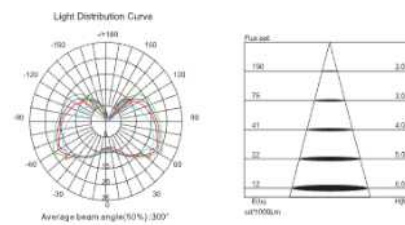

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 300°
 Installation: Suspended
 Material: Alu+PC

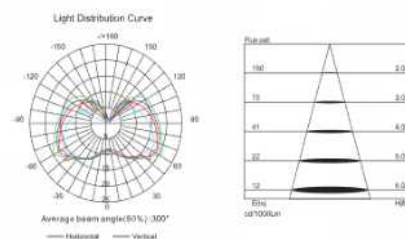

Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL02085-20W	20W	AC220-240V or AC120-277V 50/60Hz	D400*10*20	D15.7*0.4*0.8
LL02085-30W	30W		D600*10*20	D23.6*0.4*0.8
LL02085-40W	40W		D800*10*20	D31.5*0.4*0.8
LL02085-50W	50W		D1000*10*20	D39.4*0.4*0.8
LL02085-60W	60W		D1200*10*20	D47.2*0.4*0.8
LL02085-80W	80W		D1500*10*20	D59.1*0.4*0.8