





CR(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Surface Mounted
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0201M-15W	15W	AC100-240V or AC120-277V 50/60Hz	D360*116	D14.2*4.6
LL0201M-25W	25W		D450*116	D17.7*4.6
LL0201M-36W	36W		D600*116	D23.6*4.6
LL0201M-50W	50W		D800*116	D31.5*4.6

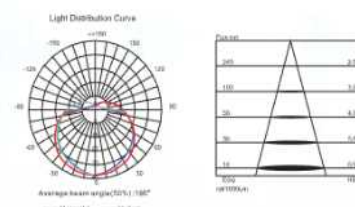

CR(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Surface Mounted
 Material: Alu+PMMA

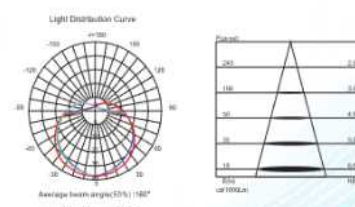

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0202M-15W	15W	AC100-240V or AC120-277V 50/60Hz	360*360*116	14.2*14.2*4.6
LL0202M-25W	25W		450*450*116	17.7*17.7*4.6
LL0202M-36W	36W		600*600*116	23.6*23.6*4.6
LL0202M-50W	50W		800*800*116	31.5*31.5*4.6