




Features:

- Nice and elegant design to add beauty to space;
- High quality material for good reliability;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Long lifetime and energy efficient.

Application:

Hotel, shop, home, museum, restaurant, etc.

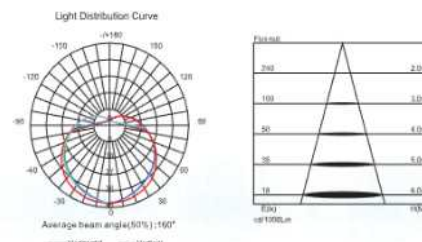

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) L*W*H	Size(Inch) L*W*H
LL0201S	LL0201S-15W	AC220-240V or AC120-277V 50/60Hz	15W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	160	Suspended	Alu+PMMA	D360*88	D14.2*3.5
	LL0201S-25W		25W									D450*88	D17.7*3.5
	LL0201S-36W		36W									D600*88	D23.6*3.5
	LL0201S-50W		50W									D800*88	D31.5*3.5
LL0202S	LL0202S-15W	AC220-240V or AC120-277V 50/60Hz	15W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	160	Suspended	Alu+PMMA	360*360*88	14.2*14.2*3.5
	LL0202S-25W		25W									450*450*88	17.7*17.7*3.5
	LL0202S-36W		36W									600*600*88	23.6*23.6*3.5
	LL0202S-50W		50W									800*800*88	31.5*31.5*3.5