




CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 360°
 Installation: Direct suspended with 1.5m power cable and safety cable / Surface mounted
 Material: Silicon
 Body color: Milk White



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0177S/M-6060	40W	AC220-240V or AC120-277V 50/60Hz	600*600*50	23.6*23.6*2.0
LL0177S/M-60120	60W		600*1200*50	23.6*47.2*2.0
LL0177S/M-120120	80W	AC120-277V 50/60Hz	1200*1200*50	47.2*47.2*2.0
LL0177S/M-120240	120W		1200*2400*50	47.2*94.5*2.0

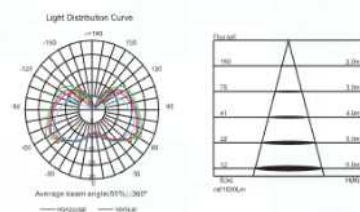